



United States Department of the Interior

U.S. GEOLOGICAL SURVEY
Reston, Virginia 20192

REPORT OF CALIBRATION of Aerial Mapping Camera

June 07, 2016

Camera type: Zeiss RMK Top 15*
Lens type: Zeiss Pleogon A3/4
Nominal focal Length: 153 mm

Camera serial no.: 142813
Lens serial no.: 142815
Maximum aperture: f/4
Test aperture: f/4

Submitted by: RIGC (NI)
Crumlin Co., Antrim, Northern Ireland

Reference:

These measurements were made on Agfa glass plates, 0.19 inch thick, with spectroscopic emulsion type APX Panchromatic, developed in D-19 at 68° F for 3 minutes with continuous agitation. These photographic plates were exposed on a multicollimator camera calibrator using a white light source rated at approximately 5200K.

I. Calibrated Focal Length: 153.779 mm

II. Lens Distortion

Field angle:	7.5°	15°	22.7°	30°	35°	40°
Symmetric radial (μm)	-1	-2	-3	-1	0	3
Decentering tangential (μm)	0	0	1	1	1	2

Symmetric radial distortion	Decentering distortion	Calibrated principal point
$K_0 = 0.7487\text{E-}04$	$P_1 = -0.7807\text{E-}07$	$x_p = 0.011 \text{ mm}$
$K_1 = -0.9453\text{E-}08$	$P_2 = -0.9733\text{E-}07$	$y_p = 0.002 \text{ mm}$
$K_2 = 0.2272\text{E-}12$	$P_3 = 0.0000$	
$K_3 = 0.0000$	$P_4 = 0.0000$	
$K_4 = 0.0000$		

The values and parameters for Calibrated Focal Length (CFL), Symmetric Radial Distortion (K_0, K_1, K_2, K_3, K_4), Decentering Distortion (P_1, P_2, P_3, P_4), and Calibrated Principal Point [point of symmetry] (x_p, y_p) were determined through a least-squares Simultaneous Multiframe Analytical Calibration (SMAC) adjustment. The x and y-coordinate measurements utilized in the adjustment of the above parameters have a standard deviation (σ) of ± 3 microns.

* Equipped with Forward Motion Compensation

III. Lens Resolving Power in cycles/mm

Area-weighted average resolution: 99

Field angle:	0°	7.5°	15°	22.7°	30°	35°	40°
Radial Lines	134	134	134	113	95	95	95
Tangential Lines	134	134	113	95	95	80	80

The resolving power is obtained by photographing a series of test bars and examining the resultant image with appropriate magnification to find the spatial frequency of the finest pattern in which the bars can be counted with reasonable confidence. The series of patterns has spatial frequencies from 5 to 268 cycles/mm in a geometric series having a ratio of the 4th root of 2. Radial lines are parallel to a radius from the center of the field, and tangential lines are perpendicular to a radius.

IV. Filter Parallelism

The two surfaces of the USGS TOP 15 test filter KL-F (60%) No. 142399 are within 10 seconds of being parallel. This filter, in conjunction with the internal "B" filter, was used for the calibration.

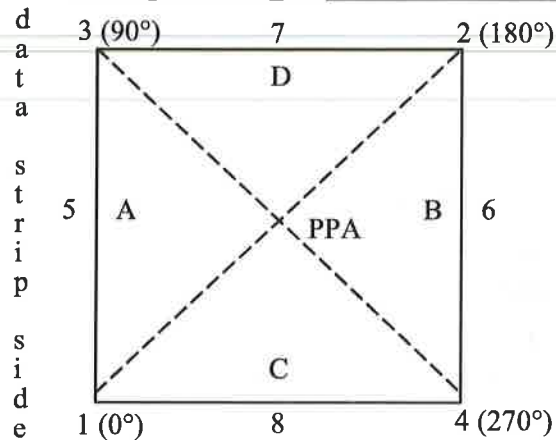
V. Shutter Calibration

Indicated Time (sec)	Rise Time (μ sec)	Fall Time (μ	½ Width Time (ms)	Nom. Speed (sec)	Efficiency (%)
1/100	3618	3733	11.28	1/110	80
1/200	1848	2074	5.24	1/250	77
1/300	1294	1270	3.52	1/370	77
1/400	928	907	2.65	1/480	78
1/500	729	730	2.03	1/640	78

The effective exposure times were determined with the lens at aperture f/4. The method is considered accurate within 3 percent. The technique used is described in International Standard ISO 516:1999(E).

VI. Magazine Platen

N/A

VII. Principal Point and Fiducial Mark Coordinates

Positions of all points are referenced to the principal point of autocollimation (PPA) as origin. The diagram indicates the orientation of the reference points when the camera is viewed from the back, or a contact positive with the emulsion up. The data strip is to the left.

Indicated principal point, corner fiducials
Indicated principal point, midside fiducials
Principal point of autocollimation (PPA)
Calibrated principal point (point of symmetry)

<u>X coordinate (mm)</u>	<u>Y coordinate (mm)</u>
0.015	0.001
0.022	0.001
0.000	0.000
0.011	0.002
<u>Fiducial Marks</u>	
1	-112.966
2	113.007
3	-112.993
4	113.033
5	-112.980
6	113.029
7	0.012
8	0.031

-112.999
113.013
112.992
-112.999
-0.003
0.005
113.004
-112.992

VIII. Distances Between Fiducial marks

Corner fiducials (diagonals)	1-2: 319.601 mm	3-4: 319.624 mm
Lines joining these markers intersect at an angle of 89° 59' 58"		
Midside fiducials	5-6: 226.009 mm	7-8: 225.997 mm
Lines joining these markers intersect at an angle of 90° 00' 09"		
Corner fiducials (perimeter)	1-3: 225.991 mm	2-3: 226.000 mm
	1-4: 225.999 mm	2-4: 226.012 mm

The Method of measuring these distances is considered accurate within 0.003 mm

Note: For GPS applications, the nominal entrance pupil distance from the focal plane is 254mm with a 10 mm filter thickness. Additional filter thickness will increase entrance pupil distance by 0.34 X added thickness.

Ryan Longhenry
Long Term Archive Project Manager
Climate and Land Use Change