



United States Department of the Interior

U.S. GEOLOGICAL SURVEY
Reston, Virginia 20192

REPORT OF CALIBRATION of Aerial Mapping Camera

April 21, 2017

Camera type: Zeiss RMK Top 15*
Lens type: Zeiss Pleogon A3/4
Nominal focal Length: 153 mm

Camera serial no.: 151978
Lens serial no.: 152095
Maximum aperture: f/4
Test aperture: f/4

Submitted by: Midwest Aerial Photography
Galloway, OH

Reference:

These measurements were made on Agfa glass plates, 0.19 inch thick, with spectroscopic emulsion type APX Panchromatic, developed in D-19 at 68° F for 3 minutes with continuous agitation. These photographic plates were exposed on a multicollimator camera calibrator using a white light source rated at approximately 5200K.

I. Calibrated Focal Length: 152.993 mm

II. Lens Distortion

Field angle:	7.5°	15°	22.7°	30°	35°	40°
Symmetric radial (μm)	1	2	1	0	-1	-2
Decentering tangential (μm)	0	0	1	2	2	3

<u>Symmetric radial distortion</u>		<u>Decentering distortion</u>		<u>Calibrated principal point</u>	
K_0	= -0.6280E-04	P_1	= 0.1933E-06	x_p	= -0.008 mm
K_1	= 0.1139E-07	P_2	= -0.6215E-07	y_p	= 0.017 mm
K_2	= -0.4137E-12	P_3	= 0.0000		
K_3	= 0.0000	P_4	= 0.0000		
K_4	= 0.0000				

The values and parameters for Calibrated Focal Length (CFL), Symmetric Radial Distortion (K_0, K_1, K_2, K_3, K_4), Decentering Distortion (P_1, P_2, P_3, P_4), and Calibrated Principal Point [point of symmetry] (x_p, y_p) were determined through a least-squares Simultaneous Multiframe Analytical Calibration (SMAC) adjustment. The x and y-coordinate measurements utilized in the adjustment of the above parameters have a standard deviation (σ) of ± 3 microns.

* Equipped with Forward Motion Compensation

III. Lens Resolving Power in cycles/mm

Area-weighted average resolution: 107

Field angle:	0°	7.5°	15°	22.7°	30°	35°	40°
Radial Lines	134	134	134	113	113	95	95
Tangential Lines	134	134	113	113	113	95	80

The resolving power is obtained by photographing a series of test bars and examining the resultant image with appropriate magnification to find the spatial frequency of the finest pattern in which the bars can be counted with reasonable confidence. The series of patterns has spatial frequencies from 5 to 268 cycles/mm in a geometric series having a ratio of the 4th root of 2. Radial lines are parallel to a radius from the center of the field, and tangential lines are perpendicular to a radius.

IV. Filter Parallelism

The two surfaces of the USGS TOP 15 test filter KL-F (60%) No. 142399 are within 10 seconds of being parallel. This filter, in conjunction with the internal "B" filter, was used for the calibration.

V. Shutter Calibration

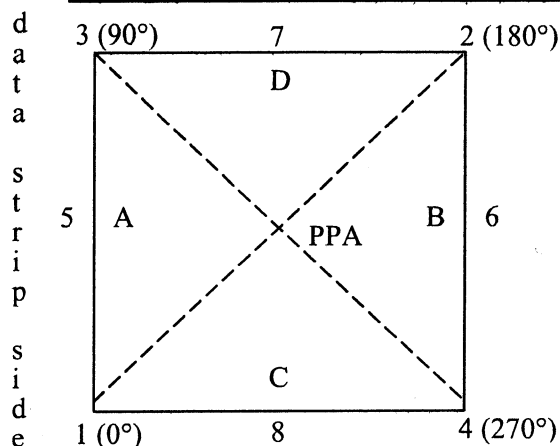
Indicated Time (sec)	Rise Time (μ sec)	Fall Time (μ	$\frac{1}{2}$ Width Time (ms)	Nom. Speed (sec)	Efficiency (%)
1/100	3652	3556	11.73	1/110	81
1/200	1842	1876	5.52	1/230	79
1/300	1090	1065	3.05	1/420	78
1/400	748	773	2.28	1/560	79
1/500	616	660	1.84	1/690	78

The effective exposure times were determined with the lens at aperture f/4. The method is considered accurate within 3 percent. The technique used is described in International Standard ISO 516:1999(E).

VI. Magazine Platen

The platen mounted in Zeiss T-MC film magazine No. 152208 does not depart from a true plane by more than 13 μ m (0.0005 in).

The platen for this film magazine is equipped with an identification marker that will register "152177" in the data strip area for each exposure.

VII. Principal Point and Fiducial Mark Coordinates

Positions of all points are referenced to the principal point of autocollimation (PPA) as origin. The diagram indicates the orientation of the reference points when the camera is viewed from the back, or a contact positive with the emulsion up. The data strip is to the left.

	<u>X coordinate (mm)</u>	<u>Y coordinate (mm)</u>
Indicated principal point, corner fiducials	0.011	-0.013
Indicated principal point, midside fiducials	-0.012	-0.015
Principal point of autocollimation (PPA)	0.000	0.000
Calibrated principal point (point of symmetry)	-0.008	0.017

Fiducial Marks

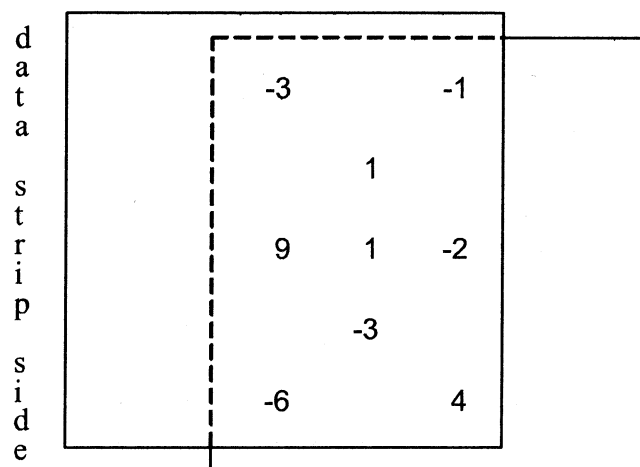
1	-112.983	-113.009
2	113.014	112.992
3	-112.984	112.982
4	113.008	-113.009
5	-112.985	-0.018
6	113.011	-0.013
7	0.011	112.980
8	-0.034	-112.927

VIII. Distances Between Fiducial marks

Corner fiducials (diagonals)	1-2: 319.611 mm	3-4: 319.600 mm
Lines joining these markers intersect at an angle of 89° 59' 58"		
Midside fiducials	5-6: 225.996 mm	7-8: 225.907 mm
Lines joining these markers intersect at an angle of 89° 59' 15"		
Corner fiducials (perimeter)	1-3: 225.992 mm	2-3: 225.998 mm
	1-4: 225.991 mm	2-4: 226.002 mm

The Method of measuring these distances is considered accurate within 0.003 mm

Note: For GPS applications, the nominal entrance pupil distance from the focal plane is 254mm with a 10 mm filter thickness. Additional filter thickness will increase entrance pupil distance by 0.34 X added thickness.

IX. Stereomodel Flatness**Magazine No:** 152208**Base/Height ratio:** 0.6**Platen ID:** 152177**Maximum angle of field tested:** 40 °

Stereomodel Test Point Array
(values in micrometers)

The values shown on the diagram are the average departures from flatness (at negative scale) for two computer-simulated stereo models. The values are based on comparator measurements on Agfa Avitone P3p copy film made from Agfa Aviphot Pan 200 film exposures. These measurements are considered accurate to within 5 μm .

X. System Resolving Power on film in cycles/mm**Area-weighted average resolution:** 51**Film:** Pan 200

Field angle:	0°	7.5°	15°	22.7°	30°	35°	40°
Radial Lines	57	57	57	57	48	48	48
Tangential Lines	57	57	57	57	48	48	40

This aerial mapping camera calibration report supersedes the previously issued USGS Report No. OSL/3588, dated February 16, 2012.

Ryan Longhenry
Long Term Archive Project Manager
Climate and Land Use Change