

U.S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS
WASHINGTON, D.C. 20234March 21, 1973

REPORT OF CALIBRATION

of Aerial Mapping Camera

Camera Type Wild Heerburg RC8
Lens Type Wild Universal Aviogon
Nominal Focal Length 6 inchesCamera Serial No. 905
Lens Serial No. UAg 362
Maximum Aperture f/5.6
Test Aperture f/8Submitted by
Air Photographics, Inc.
Purcellville, Virginia 22132

Reference: Air Photographics Purchase Order No. 8752, dated March 12, 1973.

These measurements were made using Kodak Micro Flat Glass Plates, 0.25 inch thick with Spectroscopic emulsion type V-F Panchromatic, developed in D-19 at 68°F for three minutes, with continuous agitation. These photographic plates were exposed on a multicollimator camera calibrator using K-3 filters and an incandescent tungsten light source.

I. Calibrated Focal Length: 152.57 mm

This measurement is considered accurate within 0.02 mm.

II. Radial Distortion:

Field Angle	$\bar{D}_c$	D_c for azimuth angle			
		0° B-C	90° A-C	180° A-D	270° B-D
Degrees	μm	μm	μm	μm	μm
7.5	3	4	5	2	3
15	5	6	4	3	5
22.5	4	5	4	4	3
30	0	0	0	1	0
37.5	-6	-6	-7	-7	-5
45	*	*	*	*	*

*Fiducial marks in the corners prevented measurements at 45°.

The radial distortion is measured for each of four radii of the focal plane separated by 90° in azimuth. To minimize plotting error due to distortion, the calibrated focal length is derived to equalize the absolute values of the maximum positive and maximum negative distortions. $\bar{D}$ is the average distortion for a given field angle. Values of distortion D based on the calibrated focal length are listed for azimuth angles 0, 90, 180, and 270 degrees. The radial distortion is given in micrometers and indicates the radial displacement of the image from its ideal position for the calibrated focal length. A positive value indicates a displacement away from the center of the field. These measurements are considered accurate within 5 μm .

MARCH 21, 1973

NBS Report No. 232.05/208282

III. Tangential Distortion

Field Angle	22.5°	30°	37.5°
Displacement in μm	0	1	4

The values reported are displacements from the center image point of a straight line connecting corresponding image points at equal field angles along opposite radii of the focal plane. The method of measurement is considered accurate within 5 μm .

IV. Resolving Power, in cycles/mm: Area Weighted Average Resolution 49.8.

Field Angle:	0°	7.5°	15°	22.5°	30°	37.5°	45°
Tangential lines	76	76	53	46	46	39	*
Radial lines	76	76	63	63	63	46	*

The resolving power is obtained by photographing a series of test bars and examining the resulting image with appropriate magnification to find the spatial frequency of the finest pattern in which the bars can be counted with reasonable assurance. The series of patterns has spatial frequencies in a geometric series having a ratio of the fourth root of two. Tangential lines are those perpendicular to the radius from the center of the field. Radial lines are those lying parallel to the radius.

V. Principal Point of Autocollimation

The lines joining opposite pairs of collimation index markers intersect at an angle within 1 minute of 90° and their intersection indicates the location of the principal point of autocollimation within 0.03 mm. This condition is true for both the corner and mid-side fiducials.

VI. Collimation Marker Separation

1-3	299.795 mm	1-2	211.988 mm
2-4	299.809 mm	2-3	211.985 mm
A-B	220.000 mm	3-4	212.000 mm
C-D	219.988 mm	4-1	211.994 mm


Markers A and B lie in the line of flight. The method of measuring these separations is considered accurate within 0.005 mm.

VII. Filter Parallelism

Two two surfaces of the Wild 450 Pan No. 2421 filter accompanying this camera are within ten seconds of being parallel. This filter was used for the calibration.

VIII. Magazine Platen

The platen mounted in Wild RC8 film magazine, No. 978 does not depart from a true plane by more than 13 micrometers (0.0005 inch).

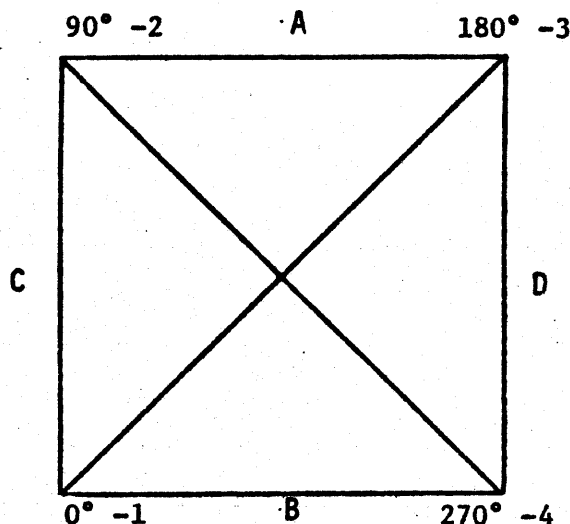

The diagram indicates the orientation of the reference points when the camera is viewed from the back. The direction of flight fiducial marker or data strip is at the top.

IX. Shutter Calibration

<u>Indicated Shutter Speed</u>	<u>Effective Shutter Speed</u>	<u>Efficiency</u>
1/200	5.2 ms = 1/192 s	88%
1/400	2.6 ms = 1/385 s	87%
1/500	2.1 ms = 1/476 s	84%
1/600	1.7 ms = 1/588 s	84%
1/700	1.5 ms = 1/689 s	81%

The effective shutter speed was determined with the lens at aperture f/8. The method is considered accurate within 3%. The technique used was a modification of the method described in American Standard PH3.4-1959.

In mechanical and optical characteristics this camera and magazine comply with the U. S. Department of Agriculture Specifications No. ASCS-AP-201, Revision 5 (Amendment 1), for a precision aerial mapping camera, dated March 15, 1972, and Forest Service Specifications dated January 31, 1969.

This report supersedes the previous calibration of this camera contained in NBS Report No. 196348, dated September 18, 1968.

For the Director,

Chris E. Kuyatt

Chris E. Kuyatt, Chief
Electron & Optical Physics Section
Optical Physics Division, IBS