

U.S. DEPARTMENT OF COMMERCE  
NATIONAL BUREAU OF STANDARDS  
WASHINGTON, D.C. 20234

NATIONAL BUREAU OF STANDARDS  
REPORT OF TEST <sub>2.2/180793-1</sub>

on

WILD AERIAL MAPPING CAMERA TYPE RC5

Equipped with

Wild Aviogen Lens No. 52

Submitted by

Harold Hoskins & Associates  
P.O. Box 1946  
Lincoln, Nebraska

The lens contained in this camera has a nominal focal length of 6 inches and maximum aperture of  $f/5.6$ . All measurements were made at aperture  $f/8$ , because of limitations imposed by the apertures of the camera calibrator. These measurements were made with collimated incident light, using a K-3 filter, a tungsten source and Eastman Kodak spectroscopic emulsion Type V-F and Aero-graphic Plus-X on micro flat glass plates. Development was in D-19 at 68°F for three minutes with continuous agitation.

1. Focal Lengths

Equivalent focal length 152.17 mm

Calibrated focal length 152.16 mm

The probable errors of these determinations of focal length do not exceed  $\pm 0.10$  mm.

## II. Distortion

2.2/180793-1

| $\beta$ | $\bar{D}_0$ | $\bar{D}_c$ | $D_c$<br>for azimuth angle |       |       |       |
|---------|-------------|-------------|----------------------------|-------|-------|-------|
|         |             |             | 0°                         | 90°   | 180°  | 270°  |
| degrees | $\mu$       | $\mu$       | $\mu$                      | $\mu$ | $\mu$ | $\mu$ |
| 0       | 0           | 0           | 0                          | 0     | 0     | 0     |
| 7.5     | 0           | 1           | 1                          | 1     | 1     | 1     |
| 15      | 0           | 2           | 4                          | -5    | 3     | 5     |
| 22.5    | -6          | -3          | -3                         | -14   | 2     | 2     |
| 30      | -6          | -1          | 7                          | -18   | 8     | -1    |
| 37.5    | -10         | -4          | 18                         | -32   | 6     | -8    |
| 45      | *           | *           | *                          | *     | *     | *     |

Values of the distortion are measured for each of four radii of the focal plane separated by 90° in azimuth. Values of the distortion based upon the equivalent focal length  $\bar{D}_0$ , are determined for points separated by 7.5° from the axis for each of the four radii. The average value of  $\bar{D}_0$  is reported in Table 1. From these values of  $\bar{D}_0$ , a calibrated focal length is derived to minimize the average value distortion over the entire field. The average value of the distortion referred to the calibrated focal length is given under the heading  $\bar{D}_c$ . Values of the distortion  $D_c$ , based on the calibrated focal length determined for each of the four radii are listed under the azimuth angles 0, 90, 180, and 270 degrees. The values of the distortion are given in microns and indicate the displacement of the image from its distortion-free position. A positive value indicates a displacement from the center of the plate. The probable error does not exceed  $\pm 10$  microns.

\* Fiducial marks in corners cut out 45° determinations.

III. Resolving Power

| Emulsion      | 0° | 7.5° | 15° | 22.5° | 30° | 37.5° | 45° |
|---------------|----|------|-----|-------|-----|-------|-----|
| <b>V-F</b>    |    |      |     |       |     |       |     |
| Tangential    | 63 | 63   | 53  | 46    | 32  | 23    | *   |
| Radial        | 63 | 76   | 53  | 63    | 53  | 46    | *   |
| <b>Plus-X</b> |    |      |     |       |     |       |     |
| Tangential    | 46 | 46   | 39  | 32    | 23  | 16    | *   |
| Radial        | 46 | 53   | 39  | 46    | 39  | 32    | *   |

The values of the resolving power are given at 7.5° intervals from the center of the field and are obtained by photographing suitable test charts comprised of patterns of parallel lines. The series of patterns of the test charts are imaged on the negative with the lines spaced in a geometric series of the fourth root of two lines to the millimeter. The row marked "tangential" gives the number of lines per millimeter in the image on the negative of the finest pattern of the test chart that is distinctly resolved into separate lines when the lines lie perpendicular to the radius drawn from the center of the field. The row marked "radial" gives similar values for the pattern of test lines lying parallel to the radius.

\* Fiducial marks in corners cut out 45° determinations.

IV. Principal Point of Autocollimation

The lines joining opposite pairs of collimation index markers intersect at an angle of  $90^\circ \pm 1$  minute, and their intersection indicates the location of the principal point of autocollimation with a probable error not exceeding  $\pm 0.03$  mm.

V. Collimation Marker Separation

|       |           |
|-------|-----------|
| A - C | 299.85 mm |
| B - D | 299.82 mm |

The probable errors in these separations do not exceed  $\pm 0.02$  mm.

VI. Tangential Distortion

| 0° | $\pm 22.5^\circ$ | $\pm 30^\circ$ | 37.5° |
|----|------------------|----------------|-------|
| 0  | 6                | 7              | 10    |

The values of the tangential distortion are measured in microns and indicate the displacement of the image from its distortion-free position. These values represent a displacement of the central image from a straight line connecting corresponding image points at equal but opposite angular separations from the axis. The probable error does not exceed  $\pm 5$  microns.


### VII. Filters

The Wild 450 PAN 1.3X No. AG52 filter accompanying this camera has surfaces plane parallel to within ten seconds of arc.

### VIII. Mounting Platen

The film platen mounted in Wild Type RC5 magazine No. 22 submitted with this camera does not depart from a true plane by more than  $\pm 0.0005$  inches.

### Fiducial Marker Location

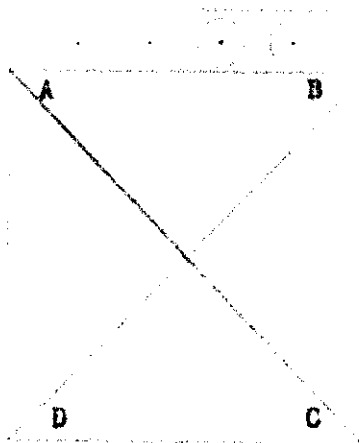

Location of referenced diagonals with respect to the corner fiducial markers. The camera is indicated as viewed from the back.

For the Director,

Francis E. Washer, Chief  
Refractometry Section  
Metrology Division

NBS Report No. 2.2/130793-1  
Washington, D.C.  
May 15, 1964  
WFL:ymen:lhf

U.S. DEPARTMENT OF COMMERCE  
NATIONAL BUREAU OF STANDARDS  
WASHINGTON, D.C. 20234

NATIONAL BUREAU OF STANDARDS  
REPORT OF TEST 2.2/180793-2  
on

ONE AERIAL CAMERA MAGAZINE PLATEN

Mounted in  
WILD MAGAZINE TYPE RC5  
No. 35

Submitted by  
Harold Hoskins & Associates  
P.O. Box 1946  
Lincoln, Nebraska

The film platen mounted in Wild Type RC5 magazine No. 35 does not depart from a true plane by more than  $\pm 0.00005$  inches.

For the Director,

Francis E. Washer, Chief  
Refractometry Section  
Metrology Division

NBS Test Report 2.2/180793-2  
May 15, 1964  
Washington, D.C.

WPT:ymen:inf